


Driveway Requirements

1. No work under this application is to be started until the application is approved and the permit is issued.
2. Where work on traveled roadway is necessary, traffic must be protected and flags, flares, and proper barricades must be placed in accordance with the standards of the Wilkin County Highway Department.
3. No foreign material such as dirt, gravel, or bituminous material shall be left or deposited on the road during the construction of driveway or installation of drainage facilities.
4. Roadside must be cleaned after work is complete.
5. Upon completion of driveway construction, the permittee shall notify the County Engineer's Office that the work has been completed and is ready for final inspection and approval by the Wilkin County Highway Department.
6. No changes or alterations in entrances may be made at any time without written consent from the Wilkin County Highway Department.
7. Driveway fill slopes shall be constructed 1:4 (1 foot vertical to 4 feet horizontal) and shall be hand finished and seeded by the owner.
8. Driveways shall be constructed as to slope down and away from the shoulder line of the County Highway for a distance of at least 15 feet with a fall of at least 3 inches.
9. Culvert pipes and aprons shall be in new condition. Only riveted pipe and 2 foot minimum width band shall be used. Aprons shall be as per MnDOT standard plate 3123J.
10. All entrances are to have aprons on both ends. Aprons are to be furnished and installed by the owner.
11. Prior to beginning any excavation work, Minnesota Law requires the applicant or their contractor to contact "Gopher State One-Call" for locations or underground utilities.
Gopher State One-Call: PH. 800-252-1166
12. If the work is not completed by date given on this application, the deposit will be used to cover the cost of completing unfinished construction by County forces. In the event that the construction has not been started by this date, this permit becomes null and void, and deposit refunded.
13. If an existing entrance is to be extended, the entrance must be brought up to the new driveway requirements.
14. The watershed will determine the proper culvert size to be installed in the entrance. Contact the local watershed to be approved for a permit.


Special Provisions:

WILKIN COUNTY HIGHWAY DEPARTMENT

DRIVEWAY/ENTRANCE TYPICAL SECTION

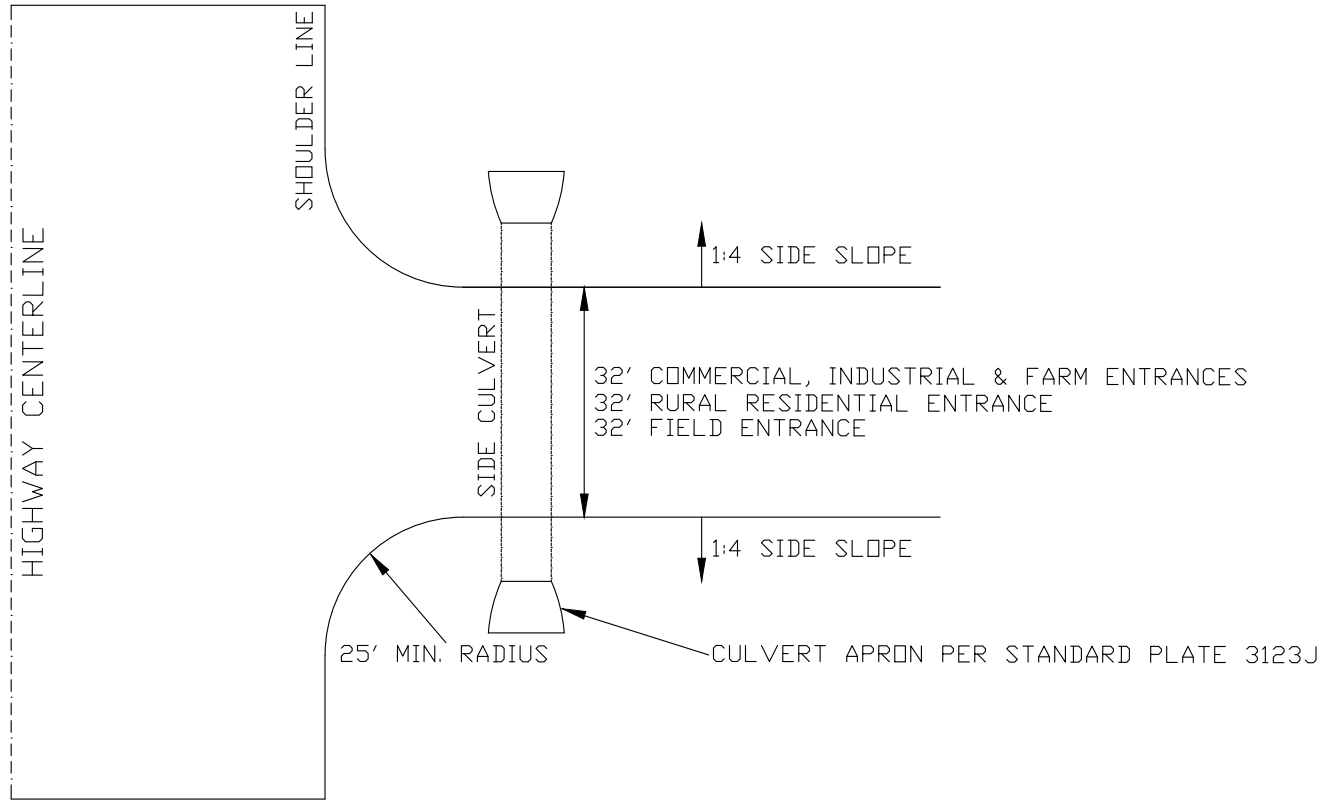

CUT SECTION

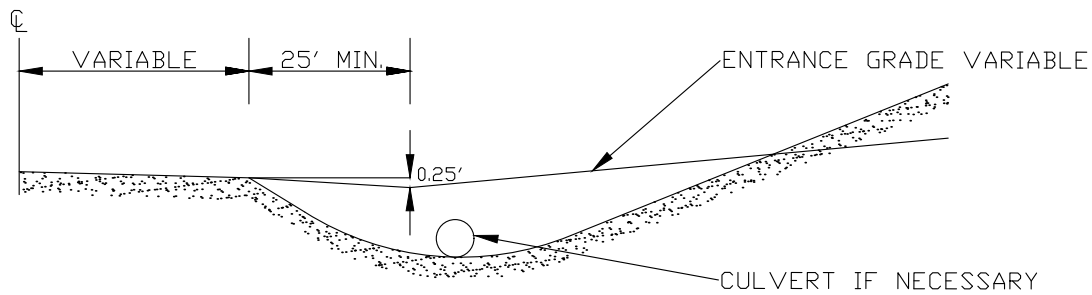

FILL SECTION

